


客先名 CUSTOMER	注文番号 ORDER NO.	品目番号 ITEM NO.
-----------------	-------------------	------------------



UNIT: mm

型番 TYPE NUMBER	チューブ 外径 TUBE O.D. T	管用平行 めねじ PIPE THREAD P	最小孔径 MIN. BORE A	差込深さ DEPTH B	組込長さ APPROX C	本体長さ BODY D	六角対辺 WIDTH ACROSS HEX		ねじ深さ DEPTH H
							E	F	
SPW-6A-2GC	10.5	G1/8	3.0	17.4	33.3	25.4	19	22	9.0
SPW-6A-4GC	10.5	G1/4	5.5	17.4	38.1	30.2	19	22	14.0
SPW-6A-6GC	10.5	G3/8	5.5	17.4	39.6	31.7	22	22	16.0
SPW-6A-8GC	10.5	G1/2	5.5	17.4	44.4	36.5	27	22	17.5
SPW-8A-4GC	13.8	G1/4	5.5	23.3	40.8	30.2	22	24	14.0
SPW-8A-6GC	13.8	G3/8	5.5	23.3	42.3	31.7	22	24	16.0
SPW-8A-8GC	13.8	G1/2	5.5	23.3	47.1	36.5	27	24	17.5
SPW-10A-8GC	17.3	G1/2	5.5	24.9	47.1	36.5	27	30	17.5
SPW-15A-8GC	21.7	G1/2	5.5	26.6	49.1	38.5	30	32	17.5

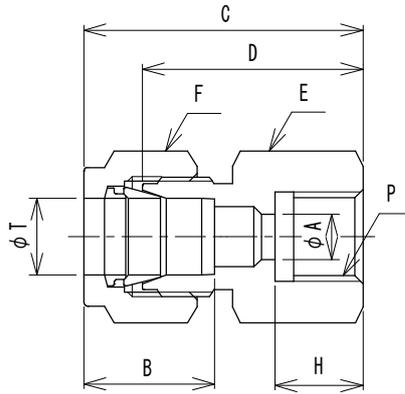

承認 APPROVED BY	検図 CHECKED BY	設計 DESIGNED BY	質量 WEIGHT	材質 MATERIAL	SUS316	数量 QUANTITY
工場長 '06.4.18 横沢	技術開発課 '06.4.17 相馬	技術開発課 '06.4.14 出口	尺度 SCALE	名称 TITLE FEMALE GAUGE CONNECTOR (SPW Type)		
三興マテリアルサプライ株式会社 Sanko Material Supply Co., Ltd.				図番 DWG. NO.	3-0034	改番 REV. 1
				備考 REMARKS		